


### 1. Model Number: LIFTF C402-F

Component Name	Component Code	Component Image
LIFTF C402-F Orange	97037-F.O	
LIFTF C402-F Red	97037-F.R	
LIFTF C402-F Black	97037-F.B	
LIFTF C40-F Metal Part	91029-F.S	

### 2. Product Stacking Diagram

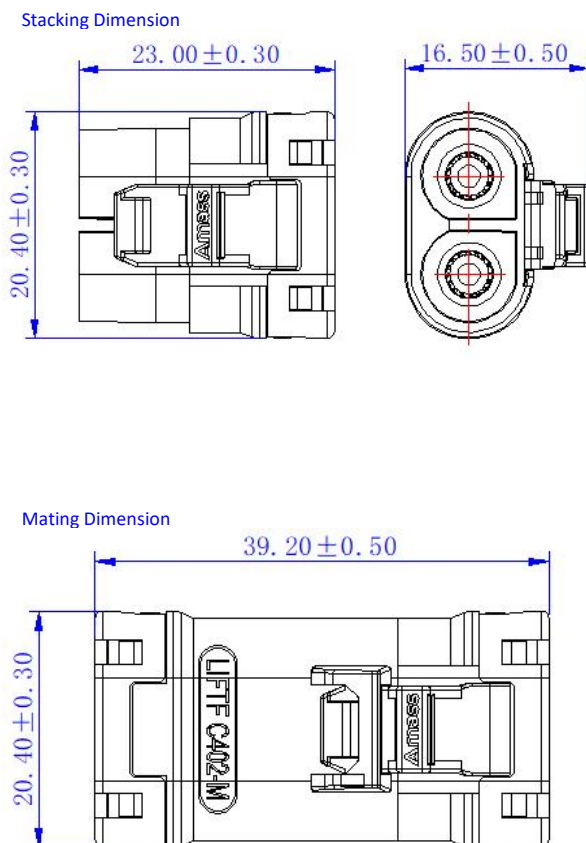

### 3. Technical Specifications

Elec. Char.	
Rated Current	35A (10AWG 0.254mm/6.0mm <sup>2</sup> 0.31mm <sup>Δ</sup> ≤30K)
	30A (12AWG 0.254mm/4.0mm <sup>2</sup> 0.31mm <sup>Δ</sup> ≤30K)
	45A (10AWG 0.254mm/6.0mm <sup>2</sup> 0.31mm <sup>Δ</sup> ≤55K)
	40A (12AWG 0.254mm/4.0mm <sup>2</sup> 0.31mm <sup>Δ</sup> ≤55K)
	60A (10AWG 0.254mm/6.0mm <sup>2</sup> 0.31mm <sup>Δ</sup> ≤85K)
	50A (12AWG 0.254mm/4.0mm <sup>2</sup> 0.31mm <sup>Δ</sup> ≤85K)
Rated Voltage	150V DC
Insulation Resistance	≥2000MΩ
Contact Resistance	≤0.6mΩ
Mech. Char.	
Service Life	30 cycles
Insertion force	≤6.5kgf
Pull out force	≥10kgf
Envi. Perf.	
Operating Temperature	-40°C to 120°C
Flame Class (Main Body)	UL94 V-0
GWFI	GWFI 850°C
Environmental Requirements	RoHS2.0, Reach, PAHS, TSCA, CP65
Salt Spray	Per GB/T 2423.17-2008, 48H min.
Mat.	
Housing	Main Plastic Housing: PBT; Orange, Red, Black
Main Copper Part	Copper-T2
Plating	Silver
Appl.	
Connection Method	Hexagonal Crimping

### 4. Transportation and Storage

- Products shall be stored in a clean and dry environment. No acid, alkali, or other corrosive gases shall be present in the vicinity of the storage area.
- Storage conditions for unopened products: Temperature: -20°C to 25°C; Humidity: ≤ 80%; Storage period: 1 year.
- For silver-plated components, store in a light-proof, sealed package. Prolonged air exposure or contact with sulfides is strictly prohibited. Bare-hand touching is not allowed.
- Products are suitable for transportation by conventional means. During transport, avoid impact, severe vibration, exposure to rain or snow, and water immersion.

### 5. Precautions

- Do not use the connector beyond its rated current and voltage, or insert/remove it while the circuit is live. Failure to comply may result in accidents or malfunction.
- The connector is intended for circuit connection only and is not a load-bearing component. Do not use the connector as part of a structural assembly.
- Use the connector only under the environmental conditions specified in this datasheet. Do not use it in locations with high temperature or high humidity.
- The connector is a precision component and is susceptible to deformation, bending, or detachment. Handle with care when unpacking.

Prepared by:

Checked by:

Reviewed by:

Approved by: