
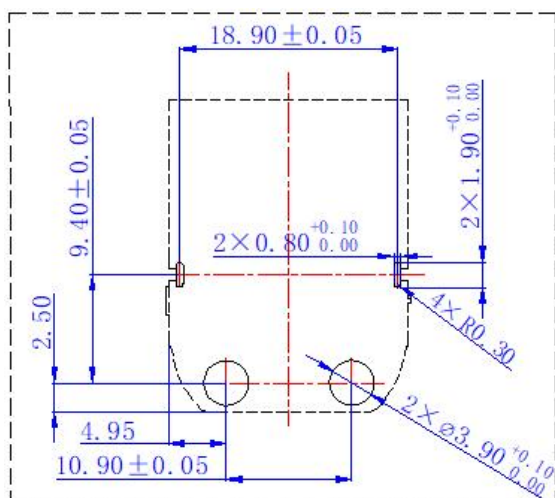



1. Model Number: XT90PW-M

Product Name	Product Code	Product Image
XT90PW-M Yellow	XT90PW-M30.G.Y	

2. Product Stacking Diagram

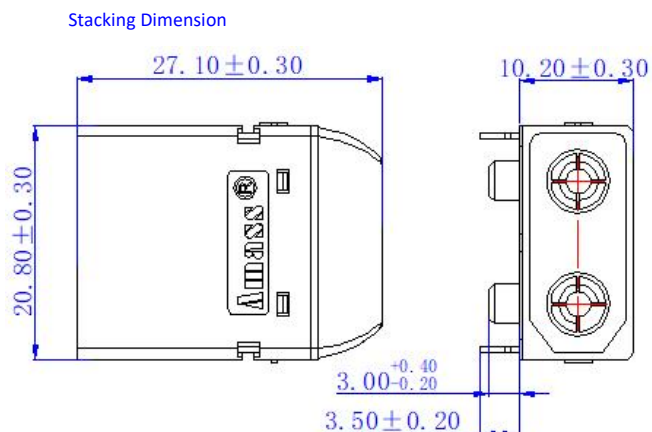

Mating Dimension

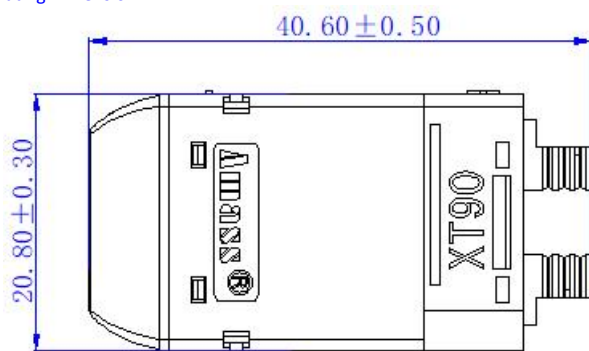

3. Technical Specifications

Elec. Char.	
Rated Current	45A ($\Delta \leq 85K$)
Rated Voltage	150V DC
Insulation Resistance	$\geq 2000M\Omega$
Contact Resistance	$\leq 1.2m\Omega$
Mech. Char.	
Service Life	100 cycles
Envi. Perf.	
Operating Temperature	-20°C to 120°C
Flame Class (Main Body)	UL94 V-0 (T min 0.8mm)
Environmental Requirements	RoHS2.0、Reach
Salt Spray	Per GB/T 2423.17-2008, 48H min.
Mat.	
Housing	Plastic Housing: PA; Yellow
Main Copper Part	Copper Alloy
Plating	Gold
Appl.	
Connection Method	Soldering

4. Transportation and Storage

- Products shall be stored in a clean and dry environment. No acid, alkali, or other corrosive gases shall be present in the vicinity of the storage area.
- Storage conditions for unopened products: Temperature: -20°C to 25°C; Humidity: $\leq 80\%$; Storage period: 1 year.
- For silver-plated components, store in a light-proof, sealed package. Prolonged air exposure or contact with sulfides is strictly prohibited. Bare-hand touching is not allowed.
- Products are suitable for transportation by conventional means. During transport, avoid impact, severe vibration, exposure to rain or snow, and water immersion.

5. Precautions

- Do not use the connector beyond its rated current and voltage, or insert/remove it while the circuit is live. Failure to comply may result in accidents or malfunction.
- The connector is intended for circuit connection only and is not a load-bearing component. Do not use the connector as part of a structural assembly.
- Use the connector only under the environmental conditions specified in this datasheet. Do not use it in locations with high temperature or high humidity.
- The connector is a precision component and is susceptible to deformation, bending, or detachment. Handle with care when unpacking.

Prepared by:

Checked by:

Reviewed by:

Approved by: